



Harkness Screens UK
 Tel +44 (0) 1438 725200
 Fax +44 (0) 1438 344400

E-Mail sales@harkness-screens.com
 www.harkness-screens.com

Harkness Screens USA
 Tel +1 (540) 370 1590
 Fax +1 (540) 370 1592



**HIGH CONTRAST GREY
 FRONT PROJECTION SCREEN
 DATA SHEET**

Document Ref DS-038 Issue 11 Dec 2011

High Contrast Grey front projection surfaces are designed to meet the needs of high output LCD and DLP projectors. A matt grey coated finish to the vinyl surface improves the perceived contrast, by enhancing the black/near-black tones.

Application

The surface is particularly suited for applications requiring enhanced contrast from video projection. It is available non-perforated and also in various perforations for use with behind screen speakers (see attenuation curve).

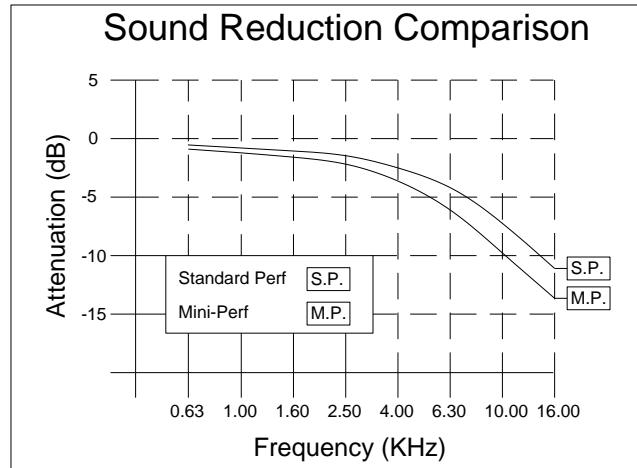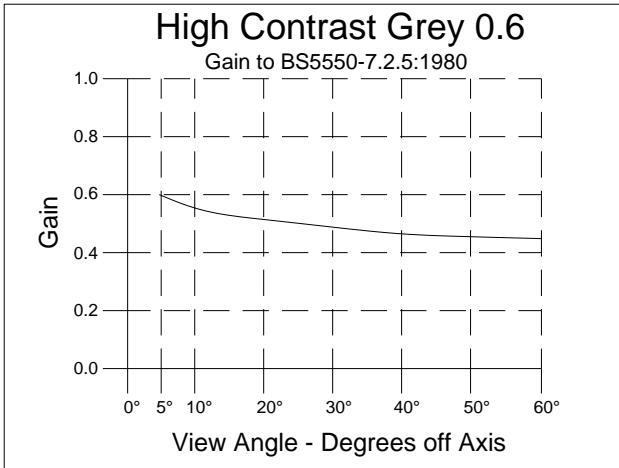

General Detail

View Distance Non-perf and MP versions are suitable for close viewing (1.5m/5'). Regular perforations are suitable for 5m viewing distance.

Maximum Size Europe manufacture 33m x 11m (108' 3" x 36' 1")

Perforations

Hole Size	Open Area
Reg Ø1.2mm (0.047")	4.5%
MP Ø0.5mm (0.020")	1.7%

Weight 0.5kg/m² (0.10lb/ft²)

Eyelet Spacing 150mm (6") nominal (US) / 200mm (8") France

Surface Edging Options

- Web and eye (grommet). Triple fold web integral with surface
- Preformed pipe pocket any size on any side
- Cloth web and fixings (snaps) for press stud frames
- Straight sides or shaped to special order
- Cut square (unfinished edge)

Fire Retardancy Certification to the following standards:

France M1
 UK BS5867 PT 2

Typical Packing

Rolled in a cardboard tube; packed in a long wooden box when height is over 7m (23').

Despatch/Storage

Screens should normally be transported and stored at temperatures between 5°C and 30°C (40°F and 85°F), with relative humidity less than 80%. If screens are very cold (e.g. following air transport) then they must be allowed to warm up before unpacking, otherwise cold cracking may occur. Screens should be installed within a maximum of 2 months of shipping. Packages should be handled with care to avoid damage.

Installation

The following principles should be followed when installing Harkness High Contrast Grey screen surfaces:

- The auditorium should be clean with no building works taking place.
- Installation should be at ambient temperature (20/24°C-68/75°F).
- Care should be taken to avoid the screen coming into contact with sharp objects during installation.
- Excessive loads should not be placed on any specific point of the screen.
- Use of cotton gloves is recommended.
- The viewing surface should not be touched (the rear of the screen is identified by the product label).
- The surface should not be creased during installation.

Care and Maintenance

The general environment where the screen is installed should be kept reasonably clean to avoid dirt and dust build-up. Screens can be periodically cleaned using a soft brush or cloth, doing this vertically with limited pressure. Screens can be cleaned using a damp cloth wetted with water and a mild detergent. Under no circumstances should the screens be cleaned with abrasive materials or harsh chemicals such as acids, bleaches or solvents. Harkness Screens is not liable for damage caused to screens through the use of inappropriate cleaning methods or chemicals.

In the interest of product enhancement, Harkness Screens reserves the right to introduce modifications or alterations without notice