



**Harkness Screens UK**  
 Tel +44 (0) 1438 725200  
 Fax +44 (0) 1438 344400

E-Mail [sales@harkness-screens.com](mailto:sales@harkness-screens.com)  
[www.harkness-screens.com](http://www.harkness-screens.com)

**Harkness Screens USA**  
 Tel +1 (540) 370 1590  
 Fax +1 (540) 370 1592

**TRANSLITE™ MIDNIGHT  
 REAR PROJECTION SCREEN  
 DATA SHEET**

**Document Ref DS-069 Issue 3 July 2008**



Translite™ Midnight is a flexible rear projection surface. It has built-in diffusion to overcome hot spotting and gives a wide viewing angle. Harkness seaming techniques ensure that screens can be made up without visible seams under normal projection conditions and viewing distances.

**Application**

Translite™ Midnight can be used in ambient light conditions. It is suitable for video, film or slide projection.

**Projection**

Viewing side is the mat side of the surface.

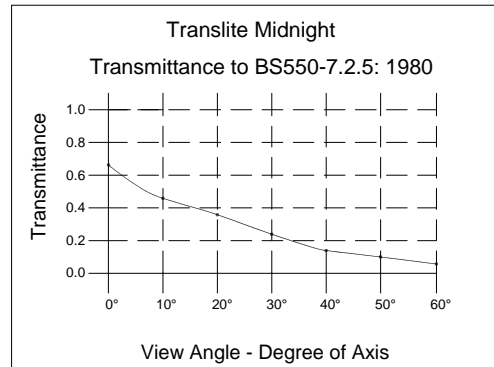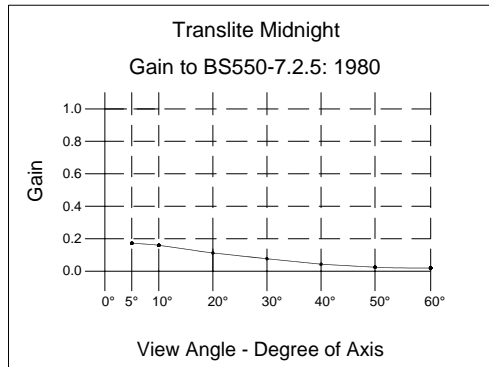

**Sizes and Shapes**

- Screens of any size or shape can be made up.
- Translite™ Midnight is also available off roll (roll width 2m/79")

**Edge Treatment**

The following edge finishes are available as standard:

- Web and eye (grommet) with 15cm (6") spacing
- Preformed pipe pocket
- Cloth web and snap fixings for press stud (snap) frames
- Cut square (unfinished edges)

**General Detail**

Weight 0.43kg/m<sup>2</sup> (0.09lb/ft<sup>2</sup>)

**Fire Retardancy**

Certification to international standards including:

- UK BS 5867 Part 2
- France M1
- Spain M1

**Typical Packing**

Translite™ Midnight screens can be folded and will be supplied as a parcel in sizes up to 90m<sup>2</sup> (1000ft<sup>2</sup>)  
 A wooden crate will be used for larger sizes. Surfaces for roller screens will be packed in a tube.

**Despatch/Storage**

Screens can be stored folded for up to one month; longer than this is not recommended.  
 Screens can be stored for longer periods if tube packed (unfolded).  
 Screens should normally be transported and stored at temperatures between 40/85°F (5/30°C) with relative humidity less than 80%.  
 If screens are very cold (e.g. following air transport) then they must be allowed to warm up before unpacking and installation, otherwise cold cracking may occur.

**Installation**

The following principles should be followed when installing Harkness Translite™ Midnight screens:

- The environment should be clean with no building works taking place.
- Installation should be at ambient temperature 68/75°F (20/24°C).
- Care should be taken to avoid the screen coming into contact with sharp objects during installation.
- Excessive loads should not be placed on any specific point of the screen.
- Use of cotton gloves is recommended.
- The viewing surface should not be touched.
- Creasing should be minimised during installation.

The securing of the screen will depend on the edge treatment specified:

- Screens with web and eyes (grommets) can be secured using sisal or screen ties (bungees)
- Unfinished screens can be secured using Harkness 'Hold-On' clips and ties.

**Care and Maintenance**

The general environment where the screen is installed should be kept reasonably clean to avoid dirt and dust build-up. Screens can be periodically cleaned using a soft brush or cloth, doing this vertically with limited pressure. Under no circumstances should the screens be made wet or cleaned with any material containing bleach or other chemicals.

In the interest of product enhancement, Harkness Screens reserves the right to introduce modifications or alterations without notice